SIGLENT

EMI Test Accessories
User Manual

SIGLENT TECHNOLOGIES CO.,LTD

1. Feature

	Description	Features
	Magnetic near-field probe can detect the magnetic field within 10cm,mainly used for the chassis leak test Frequency range:30MHz-3GHz Resolution:25mm	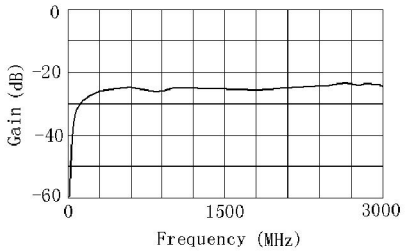
	Magnetic near-field probe can detect the magnetic field within 3cm Frequency range:30MHz-3GHz Resolution:10mm;	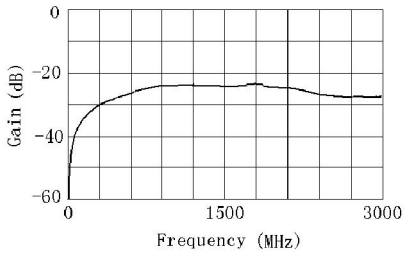
	Magnetic near-field probe. is mainly used for cable electromagnetic leakage test Frequency range:30MHz-2GHz Resolution:5mm;	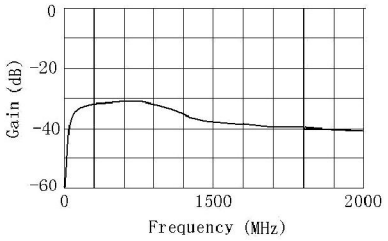
	Magnetic near-field probe can detect the emission of electromagnetic fields generated by the PCB layout Frequency rang:30MHz-3GHz Resolution:2mm	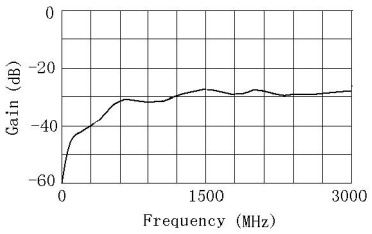
	mainly used for amplifying small signals. 20dB gain. Can greatly improve system sensitivity of the test.	Bandwidth：100KHz-2GHz Typical gain：19.5dB

2. Application

- EMI radiated interference source location
- magnetic-field intensity test

Operation Sketch：

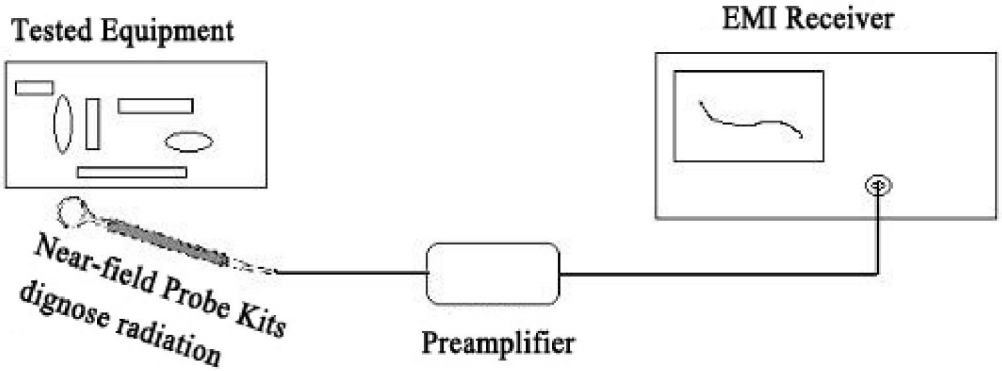

3. Packing List

Packing List	
NAME	Qty
Near-Field Probe	4
Preamplifier	1
SMB-BNC cable	1
User Manual	1
High-grade Kit	1